RFID STICKER LABEL

RFID Sticker Label, 4" × 6"

Part # **SN128C01311221** · 101.6 × 152.4 mm


Large sticker RFID label for cartons, boxes and shipping labels.

SIZE	CHIP	LABELS PER ROLL	CORE / ROLL
4" × 6"	NXP UCODE 9	2,000	1" / 8"

PICTURES AND DRAWINGS



Roll and roll specifications

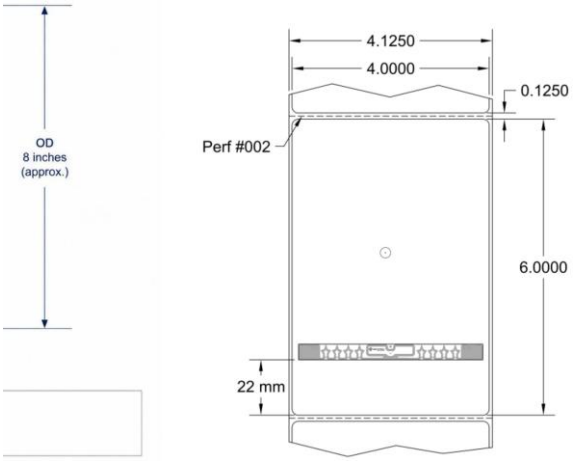

Label dimensions (in)

CHIP AND MEMORY

Manufacture / IC	NXP / UCODE 9
Protocol	ISO 18000-6C EPC Class1 Gen2
Frequency band	860–960 MHz
EPC memory	96 bits
TID memory	96 bits
User memory	0 bits
Password	32 bits Access / 32 bits Kill
ESD voltage immunity	2000 V max (HBM)

CONSTRUCTION AND ENVIRONMENT

Face stock	TT Paper
Inlay	NXP UCODE 9
Antenna substrate	PET
Adhesive	Permanent / Hot Melt
Liner	40# CK
Operating temperature	5 to 60 °C (41 to 140 °F)
Storage temperature	20 to 30 °C (68 to 86 °F)
Shelf life	1 year in anti-static bag at 20–30 °C / 20–60% RH

ROLL AND CARTON

(ID) Inner core diameter	1 inch
Quantity per roll	2000 pcs
Roll size (OD, outer diameter)	8 inches
Rolls per box	4
Carton dimension	460*460*300 mm
Weight per box	25-30 kgs

PERFORMANCE (POWER ON TAG FORWARD VS FREQUENCY)

